


PRODUCT DESCRIPTION

Rubio® WoodCream is a water-based cream, which makes wood water repellent after treatment. This results in a long-lasting pearl effect.

Due to the cream structure, it is easy to apply, especially on vertical wood. Rubio® WoodCream is available in 7 shades of grey, which gives the wood an aged look. A transparent version is also available, which allows the wood to age naturally, but protects it and makes it water-repellent. This transparent version will also protect already aged wood.

Depending on the chosen colour, wood type and orientation of the vertical wood, the chosen colour will last between 2 and 5 years. After that, the natural grey shades will gradually take over. After about 2 years, the pearl effect will gradually diminish.

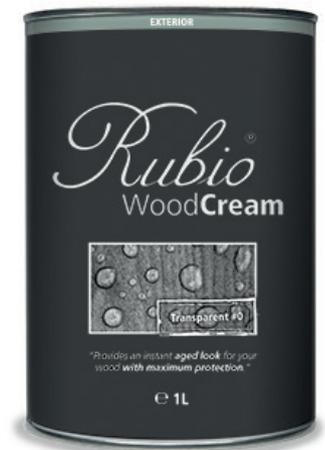

PRODUCT INFORMATION

› Unique characteristics

- Water resistant result with long-lasting pearl effect.
- Self-cleaning
- Cream structure for optimum convenience.
- Choose from 7 colours for an aged look and one transparent colour to protect already aged exterior walls.
- 0% VOC
- Not film-forming, does not flake off.
- Excellent for soft wood types.

› Technical characteristics

- Chemical basis: water-based
- Physical state: cream
- Density: 950-1050 g/L
- Acidity degree: 8.0 - 9.0
- Gloss level: matt
- Drying time: depending on the climatic conditions: ± 12 hours
- Dry to the touch after 30 minutes.
- The pearl effect already starts after 3 hours.

› Colors on pine




Transparent #0



Aged #1



Aged #2



Aged #3



Aged #4



Aged #5



Aged #6



Aged #7

› Colors on Thermowood



Transparent #0



Aged #1



Aged #2



Aged #3



Aged #4



Aged #5



Aged #6



Aged #7

REMARK:

- The colour Transparent #0 can be used to decrease the intensity of the other colours.
- The pigment in the various Rubio WoodCream colours contributes to the protection of the wood from greying. **ATTENTION:** The colour Transparent #0 is not pigmented, which will cause the natural greying to occur in exterior environments.

› Packaging


Can 100 ml, 1 L, 2,5 L, 5 L and 20 L

› Storage

The product can be stored for up to 12 months. Store in dry conditions and in the original unopened packaging. Protect from frost.

APPLICATION INFORMATION

Rubio® WoodCream makes your wood water-repellent. By using the pigmented shades of grey, the wood gets a naturally aged look. The wood gets a water-repellent effect without changing the natural aspect of the treated surface. Due to water being repelled, the wood will also be less prone to shrinking and swelling. After prolonged rainfall, this pearl effect will disappear temporarily, but after the wood is dried out, the pearl effect will return. A transparent version is also available, which allows the wood to age naturally, but protects it and makes it water-repellent. This transparent version also protects already aged wood.

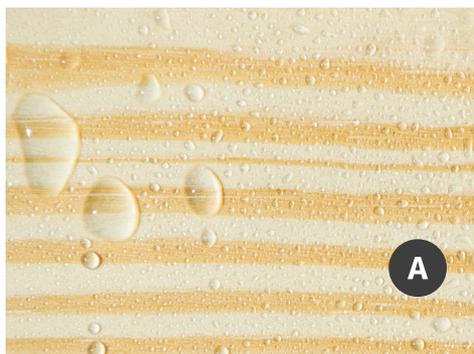

A.
Water-repellent character,
treated with Rubio® WoodCream.

B.
Water-absorbent character,
not treated with Rubio® WoodCream.

› Preparation


- Ambient temperature: 10°C – 25°C
- Substrate temperature: 10°C – 25°C
- Application temperature: 10°C – 25°C

› Instructions for use




STEP 1

Ensure that vertical wood is dry and clean. In case of extremely soiled and oily wood or mildew stains, we recommend to clean the wood with **RMC Exterior Wood Cleaner**. The wood must be thoroughly rinsed with water after the use of RMC Exterior Wood Cleaner before application of the Rubio® WoodCream. Consult the accompanying technical data sheet before use.



STEP 2

Stir Rubio® WoodCream well before applying it (undiluted), carefully and evenly, to the vertical surface with a block wall-ceiling brush, in the direction of the wood.



STEP 3

Immediately rub the product onto the surface with a sponge/rag or a brush if it is a rough surface, in the direction of the board. Work in zones of 3 to 4 boards in a horizontal direction. Do not apply the product too thickly. Only what the wood can absorb is what is needed for effective protection.

› Consumption

- Depending on the type of substrate: 60 - 80 g/m².
- These coverage indications are purely indicative. You must use a sample to determine the exact coverage.

› Tips

- We recommend always using a sample.
- Rubio® WoodCream is great for soft wood types. In wood types that are rich in contents, such as, for example, Oak, Red Cedar, Afzelia, etc., discolouration and efflorescence may occur, due to leaching of water-soluble or oily compounds.
- Apply 60 to 80 g/m² in 1 single coat. The exact amount needed depends on the absorption of the substrate.
- Do not apply too much product; only what the wood can absorb is what is needed for effective protection.
- Maximum permissible moisture percentage for coniferous wood is 18% for coniferous wood and 12% for deciduous wood.
- Stir well before use.
- Do not perform treatment with Rubio® WoodCream in direct sunlight.

› Tools



› Cleaning

It is best to clean tools with water.

› Maintenance

- The surface must be clean and dry and can be treated with the initial product, without sanding first.
- The process is identical to these summarized instructions for use.

HEALTH AND SAFETY INSTRUCTIONS

For information and advice about the safe handling, storage and removal of chemicals we refer the user to the most recent safety data sheet, which contains physical, ecological, toxicological and other safety information. Our products need to be stored, applied and handled carefully.

Check the packaging and the safety data sheet for more details.

For our complete assortment of products for the protection and colouring of interior and exterior wood, please visit www.rubiomonocoat.com

YOUR DISTRIBUTOR:

LIABILITY: It is the user's responsibility to establish, through his own tests, whether the product is suitable for the chosen application. In no case can Muylle Facon NV be held liable for any consequential damage. The information above may be subject to changes, which will be published in the updated versions of the technical data sheet. We cannot be held liable for poor results due to causes that are not related to the quality of the product. This technical information has been drawn up based on the currently available information and knowledge. The most recent technical data sheets can be requested or are available on the website. **Date of TDS: 17/07/2018. Check the safety information before using the product.**



Rubio[®] MONOCOAT

MUYLLE  FACON

Muylle Facon BVBA
Ambachtenstraat 58
8870 Izegem (BELGIË)

Tel. +32 (0) 51 30 80 54
Fax +32 (0) 51 30 99 78
info@muyllefacon.be

www.rubiomonocoat.com